

SuperFinisher™

MAX®

NF255-ST/18

drives 5/8"~23/16" (15~55mm) brads

18GA. BRAD NAILER



Unique Tangle Free Swivel Joint

FEATURES

- Lightweight — only 2.6 lbs
- Lock-out mechanism-Tool will not fire when magazine is empty
- Dial adjustable depth control
- Slim nose for reaching tight spot
- No-mar contact tip included
- Quick side loading system
- Rear exhaust air design
- Sequential trip trigger valve
- Comes with plastic carrying case
- Trigger Lock Lever
- Transparent magazine to show reloading timing
- Built in silencer

APPLICATIONS

- Door and window casings
- Plywood, decorative board and other interior finish work
- Panel assembly and moldings
- Subflooring
- Furniture assembly including drawer assembly, case back nailing, blind pinning and other finishing work
- Cabinet assembly

TOOL SPECIFICATIONS

MODEL	NF255-ST/18
WEIGHT	2.6 lbs
DIMENSIONS	9 1/2" x 2 3/8" x 10 1/8"
LOAD CAPACITY	100 brad nails
OPERATING PRESSURE	70-100 p.s.i.
AIR CONSUMPTION	0.018 ft ³ /cycle (90 p.s.i. operating pressure)


FASTENERS AVAILABLE

Collation type



Shank type

BRAD NAILS SLIGHT-HEADED BRAD NAILS

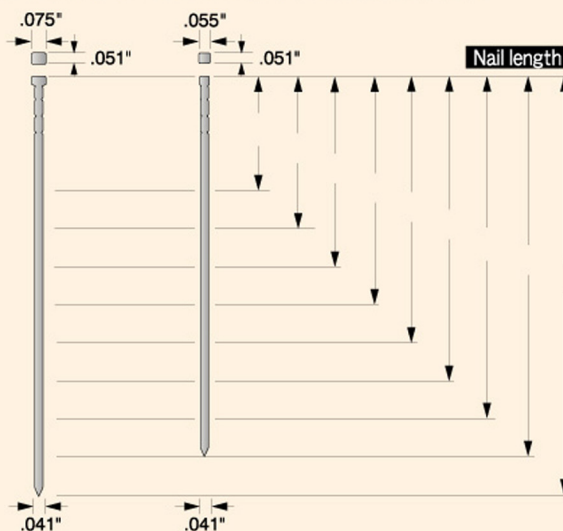

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



MAX USA CORP.

257 East 2nd Street Mineola, New York 11501
Phone: 800-223-4293 Fax: 516-741-3272
www.maxusacorp.com

Dealer: