

# SuperFinisher™

# MAX®


## NF255F/18

18GA. Brad Nails

Drives 15~55mm (5/8"~2-3/16") length brad nails

### FEATURES

- **Lightweight-only 1.2kg & Slim body**  
Compact and well balanced body. Easily reaches tight spots.
- **Selectable fire mechanism**  
The tool can be contact or single fired with switch lever.

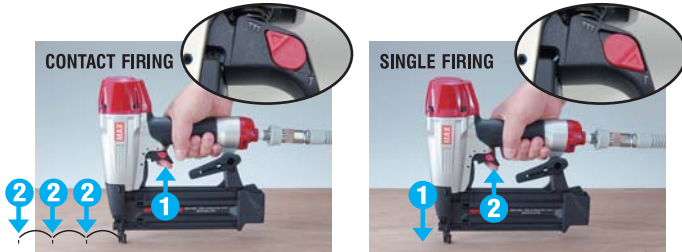

- **Dial adjustable depth control**  
Dial depth control requires no special tools.

- **Easy jam clearance system**



- **Belt hook**

- **Nail indicator on the magazine**



### APPLICATIONS

- Door and window casings
- Plywood, decorative boards, and other interior finish works
- Panel assembly and moldings
- Sub flooring
- Furniture assembly, case back fastening, blind pinning and other finishing work
- Cabinet assembly





Comes with a Plastic carry case

### TOOL SPECIFICATIONS

PRODUCT NO.	NF255F/18	
DIMENSIONS	255(H)×64(W)×244(L)mm 10"×2-1/2"×9-5/8"	
WEIGHT	1.2kg (2.7lbs)	
RECOMMENDED OPERATING PRESSURE	5 to 7bar (70 to 100 p.s.i.)	
LOADING CAPACITY	100 brads	
AIR CONSUMPTION	0.68l (0.024ft³) at 7bar operating pressure	
TECHNICAL DATA NOISE	A-weighted single-event sound power level	LWA, 1s, d 85.9dB
	A-weighted single-event sound pressure level	LpA, 1s, d 79.8dB
These values are determined and documented in accordance to EN12549:1999		
VIBRATION	2.36m/s²	
Vibration characteristic value These values are determined and documented in accordance to ISO 8662-11		

### FASTENERS APPLICABLE

18 Ga. brad nails

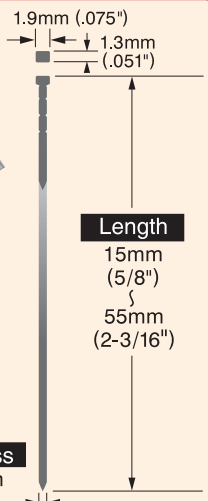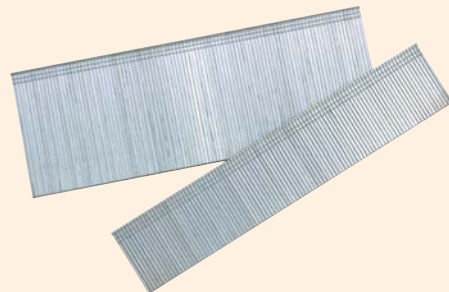

Skill-Pro



The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products

MAX CO.,LTD.

6-6 NIHONBASHI HAKOZAKI-CHO, CHUO-KU, TOKYO, JAPAN  
PHONE: 81-3-3669-8131 FAX: 81-3-3669-7104  
Web: <http://www.max-ltd.co.jp/int/>

Distributor: