


Cordless SuperFramer® GS690RH



STANDARD EQUIPMENT

- Rechargeable battery
- AC battery charger
- Safety glasses
- Plastic carry case

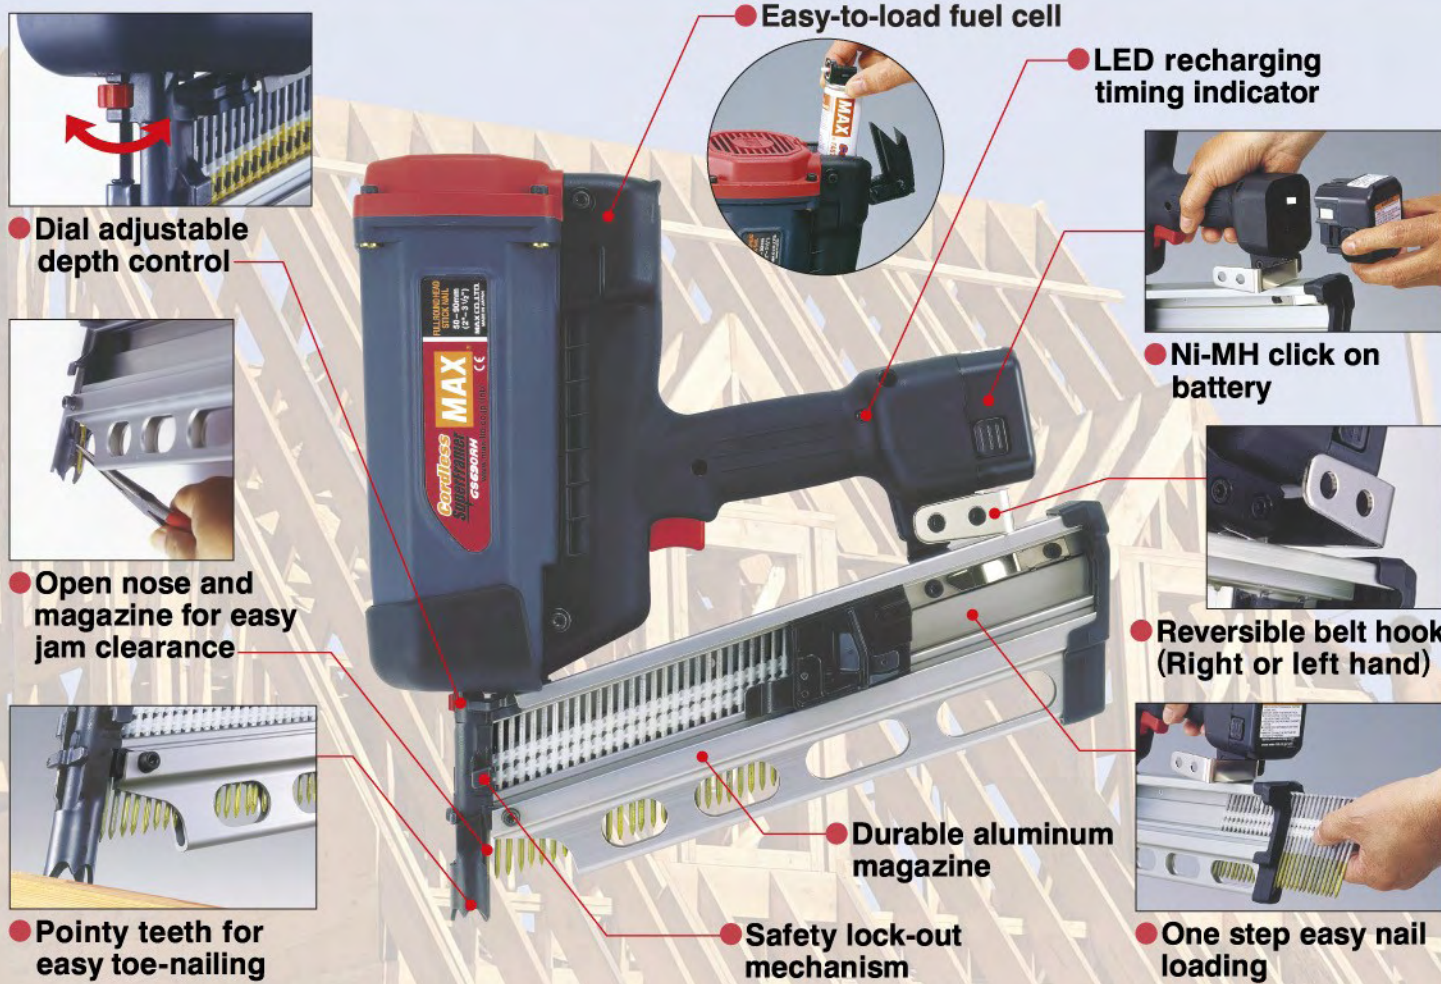


OPTION



TOOL SPECIFICATIONS

Product name	GS690RH
Dimensions	382(H) × 111(W) × 379(L)mm (15" × 4-3/8" × 15")
Weight	3.5 kg (7.8 lbs)
Load Capacity	32 nails/1 strip
Firing mode	Sequential trip
Battery type	Ni-MH 6V DC 1.5Ah
Recharge time	150 minutes at maximum
Battery life/charge	Approx. 3,000 nails
Fuel cell life	Approx. 1,200 nails
NOISE	A-weighted single-event sound power level LWA, 1s, d 105.4dB A-weighted single-event emission sound pressure level at work station LpA, 1s, d 98.8dB These values are determined and documented in accordance to EN12549:1999.
VIBRATION	Vibration characteristic value = 4.46m/s ² These values are determined and documented in accordance to ISO 8662-11

APPLICABLE FASTENERS

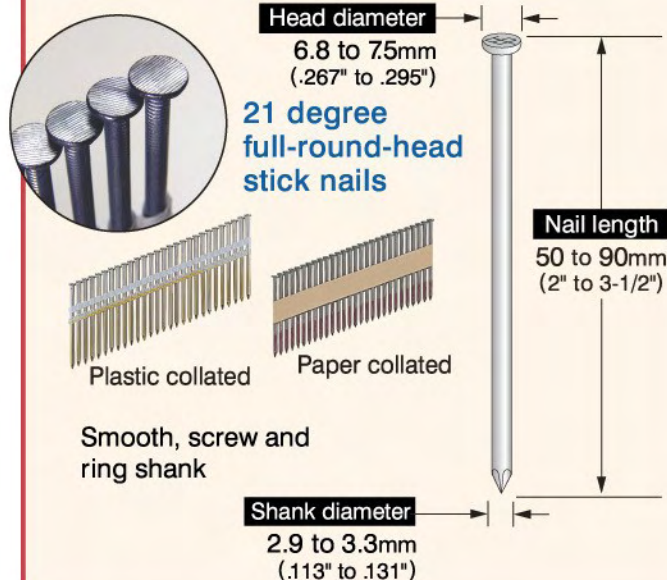

The specifications and design of the products in this catalog will be subject to change without advance notice due to our continuous efforts to improve the quality of our products.



MAX CO., LTD.

6-6 NIHONBASHI HAKOZAKI-CHO, CHUO-KU, TOKYO, JAPAN
PHONE: 81-3-3669-8131 FAX: 81-3-3669-7104
www.max-ltd.co.jp/int/

Distributor: